

Ajouter un partage NFS Synology en tant que répertoire de sauvegarde

> Mon serveur Veeam est sur le contrôleur de domaine. Cela n'est pas du tout une bonne pratique. Il s'agit d'un lab, c'est une question de ressources.


Dans la console Veeam :

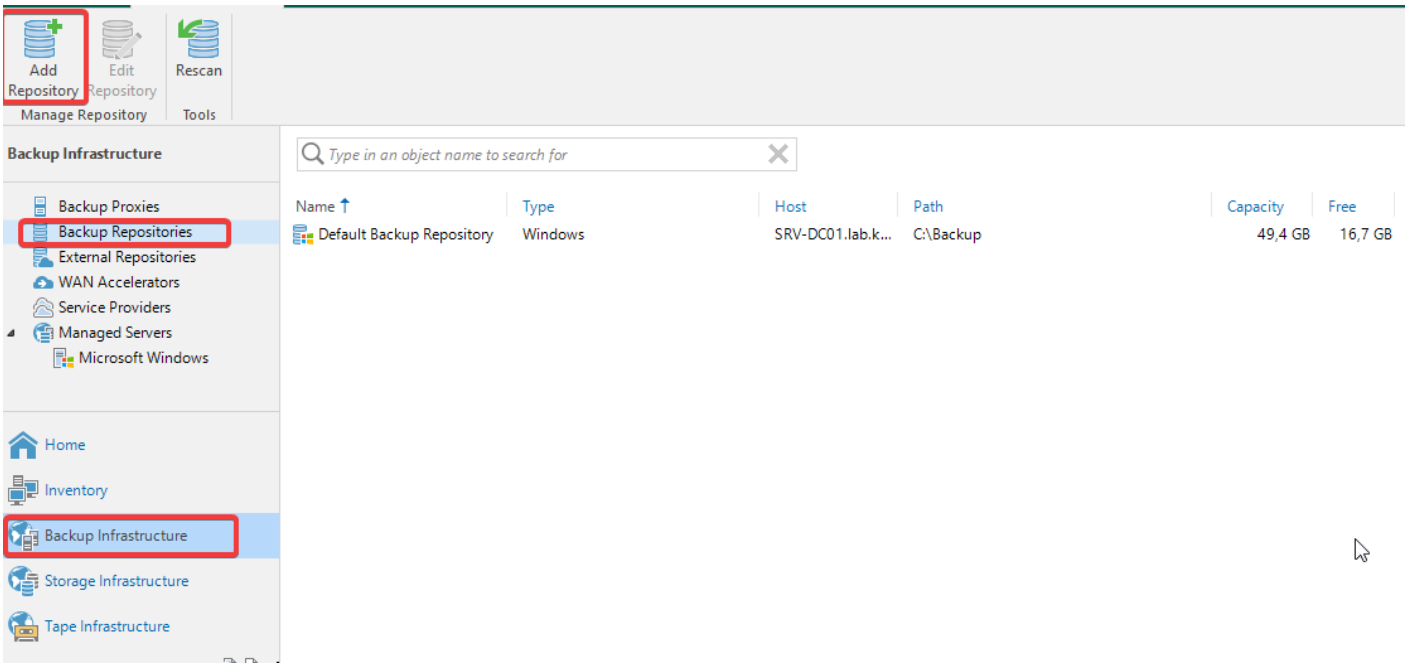

On choisit "Network attached storage".

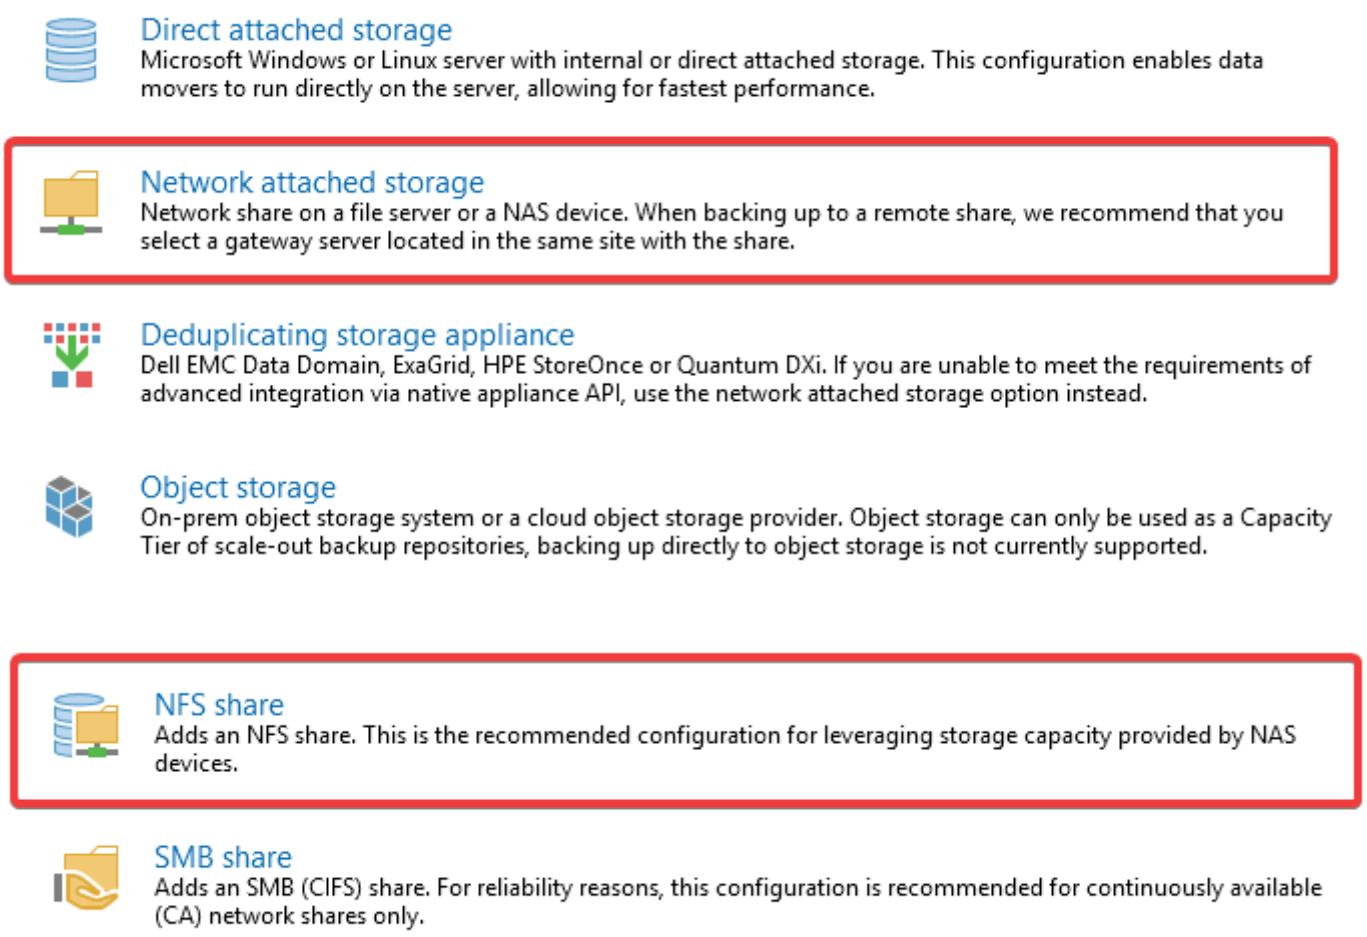


On donne ensuite un nom et une description.

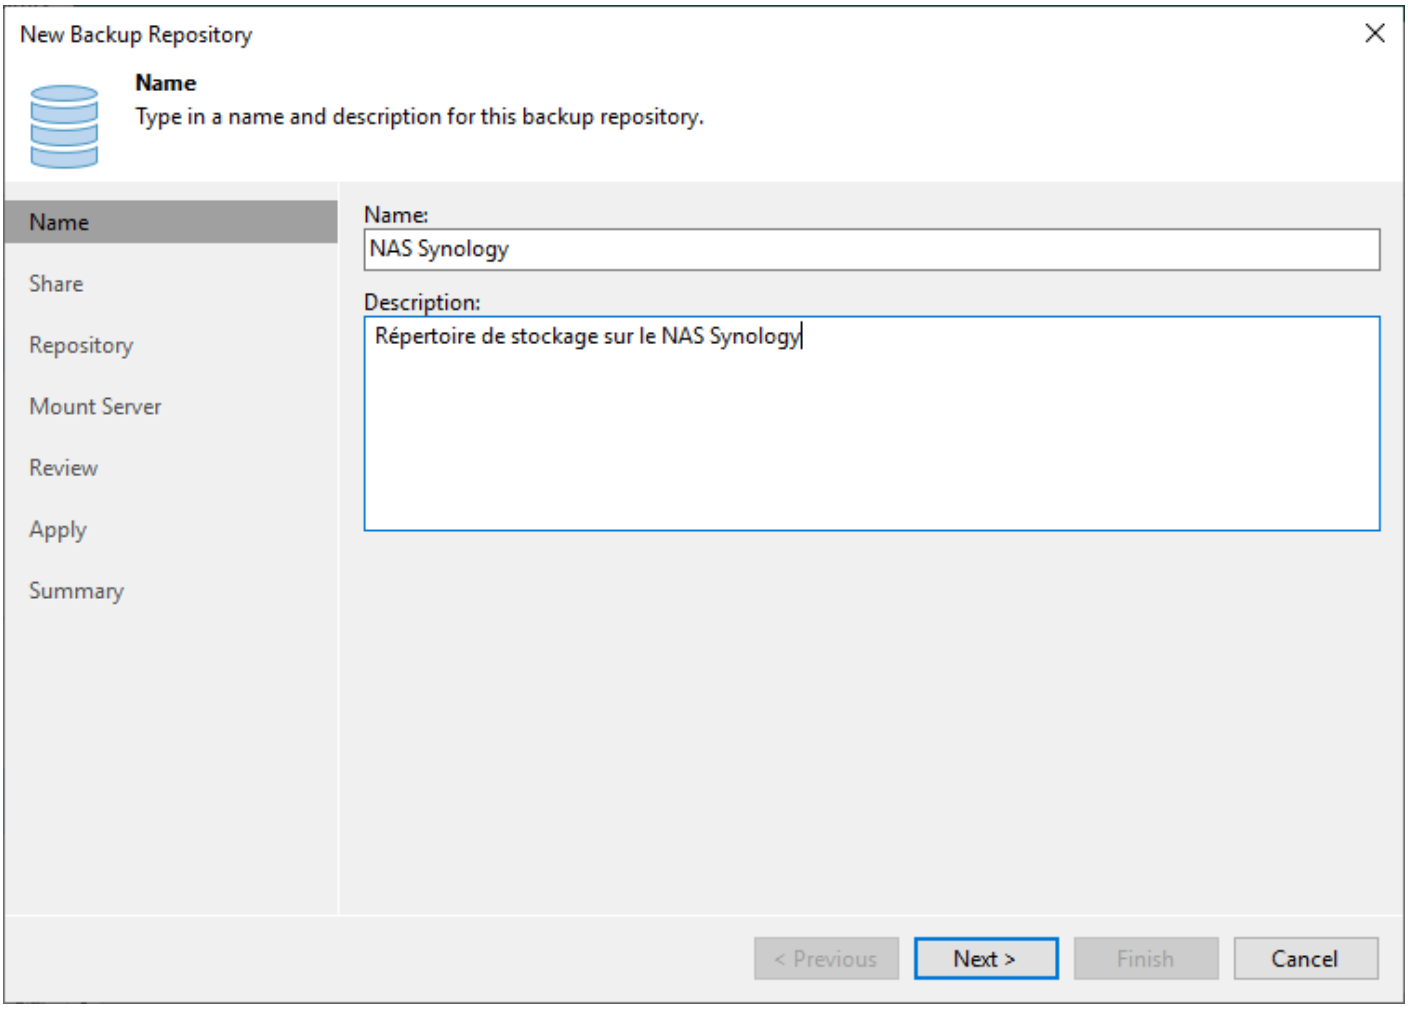


On rentre le nom du serveur (ou adresse IP) et la cible.


> Le chemin d'un dossier partagé NFS Synology est :
> hostname:/nom_du_volume/nom_du_partage

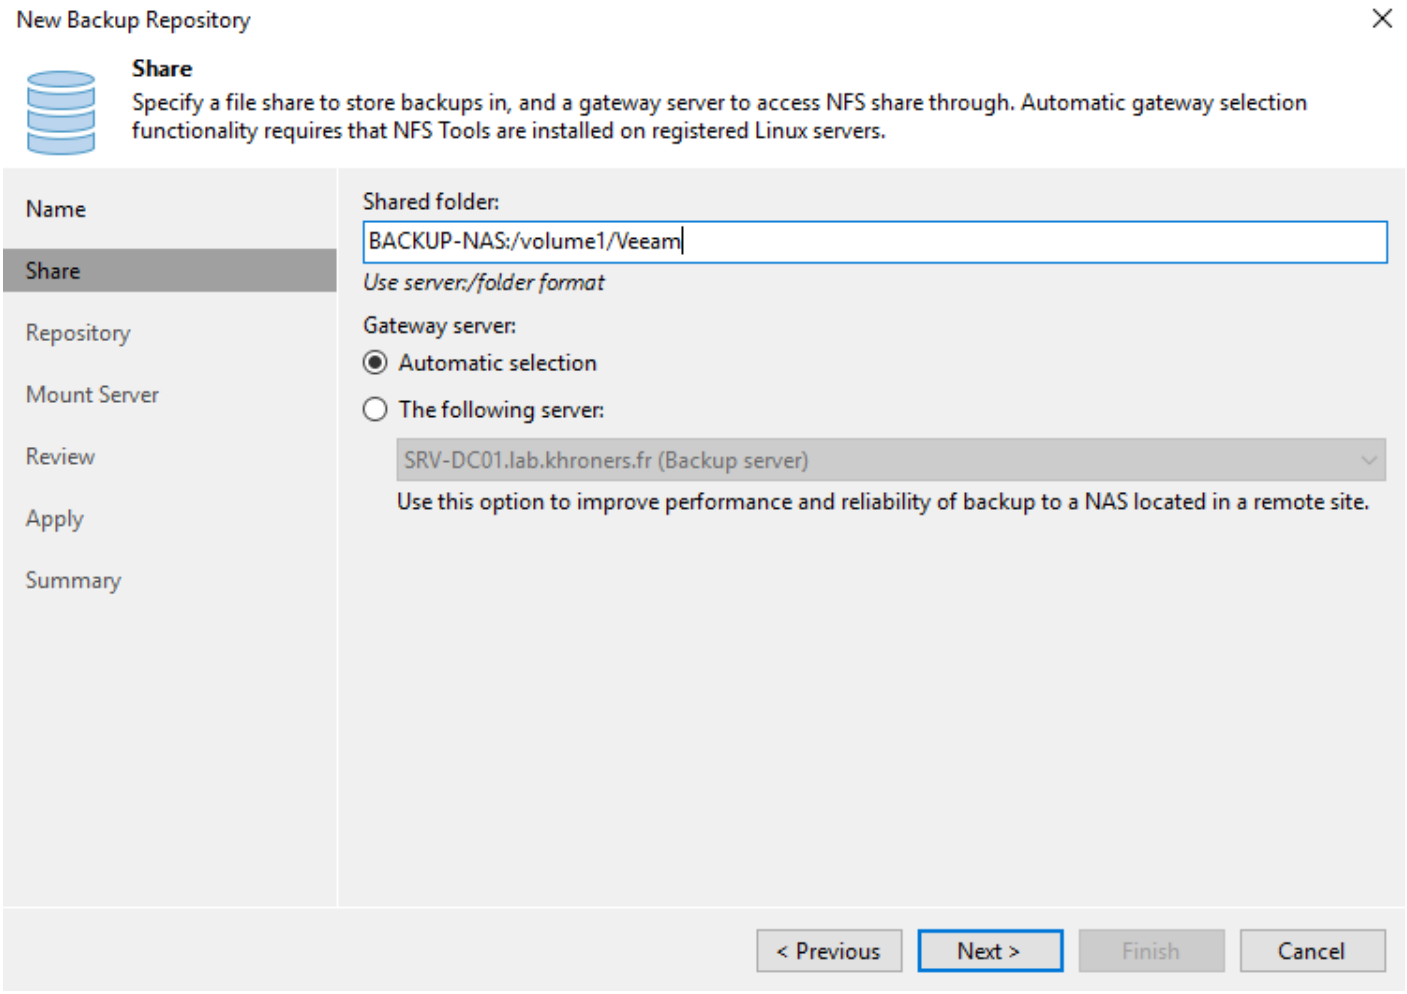


Cette fenêtre apparait pour vérifier la connexion.

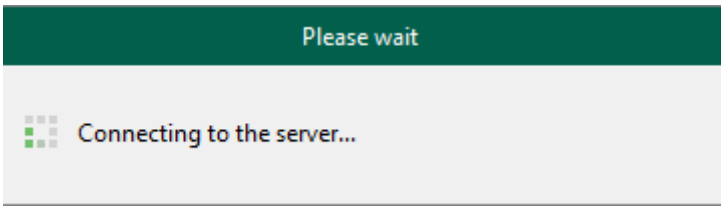


On obtient les informations à propos du partage. On peut également définir les tâches parallèles et la limite de lecture/écriture.

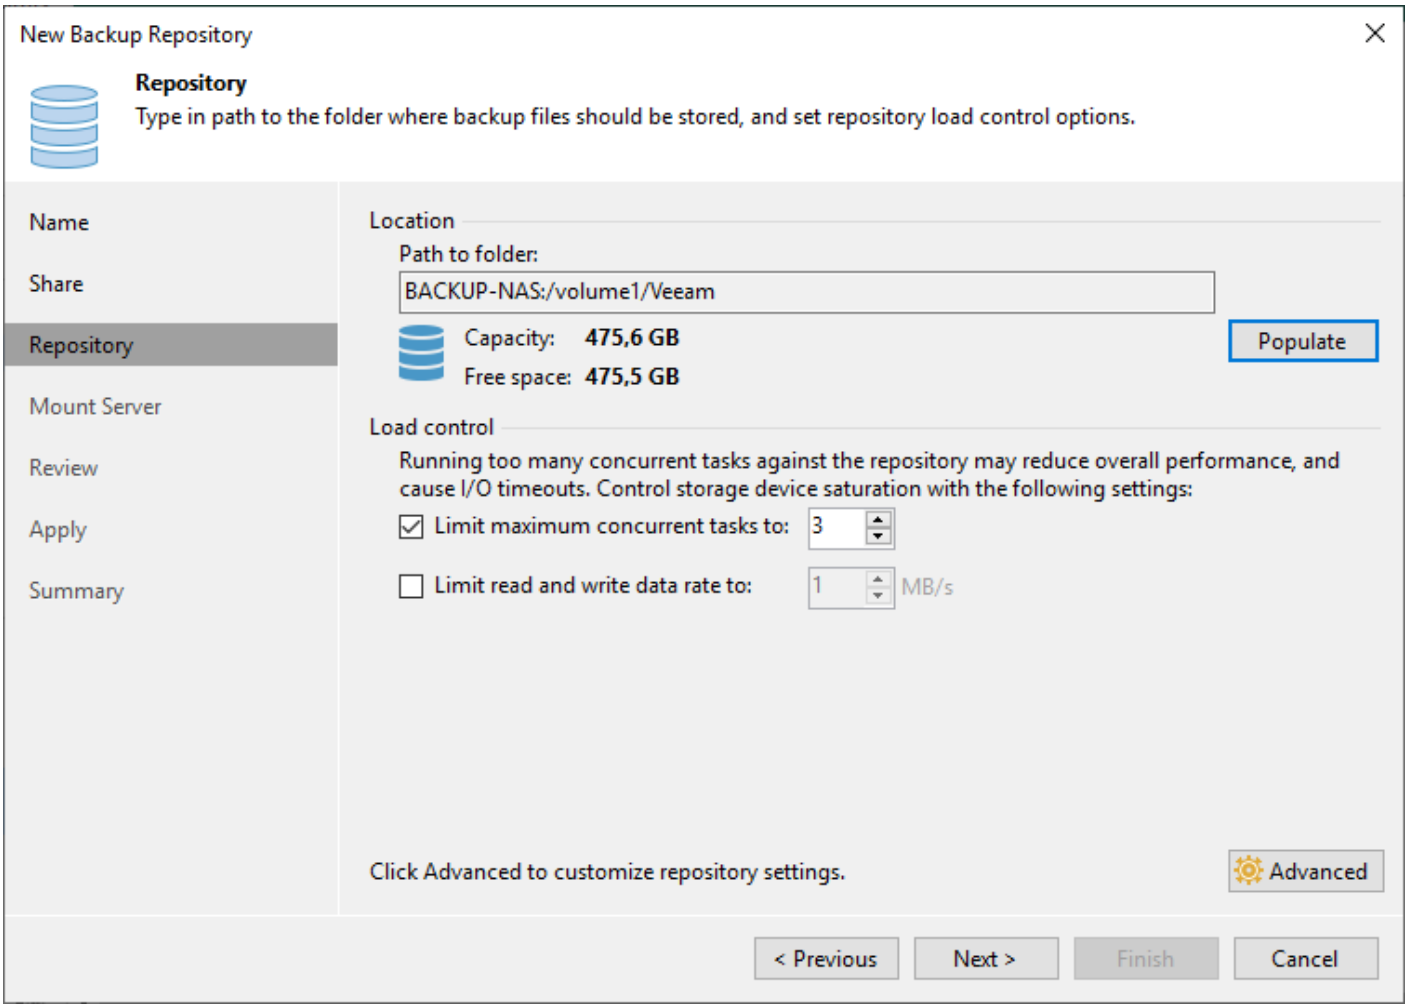


Je décoche la case car cette fois je n'utilise pas ESXi.

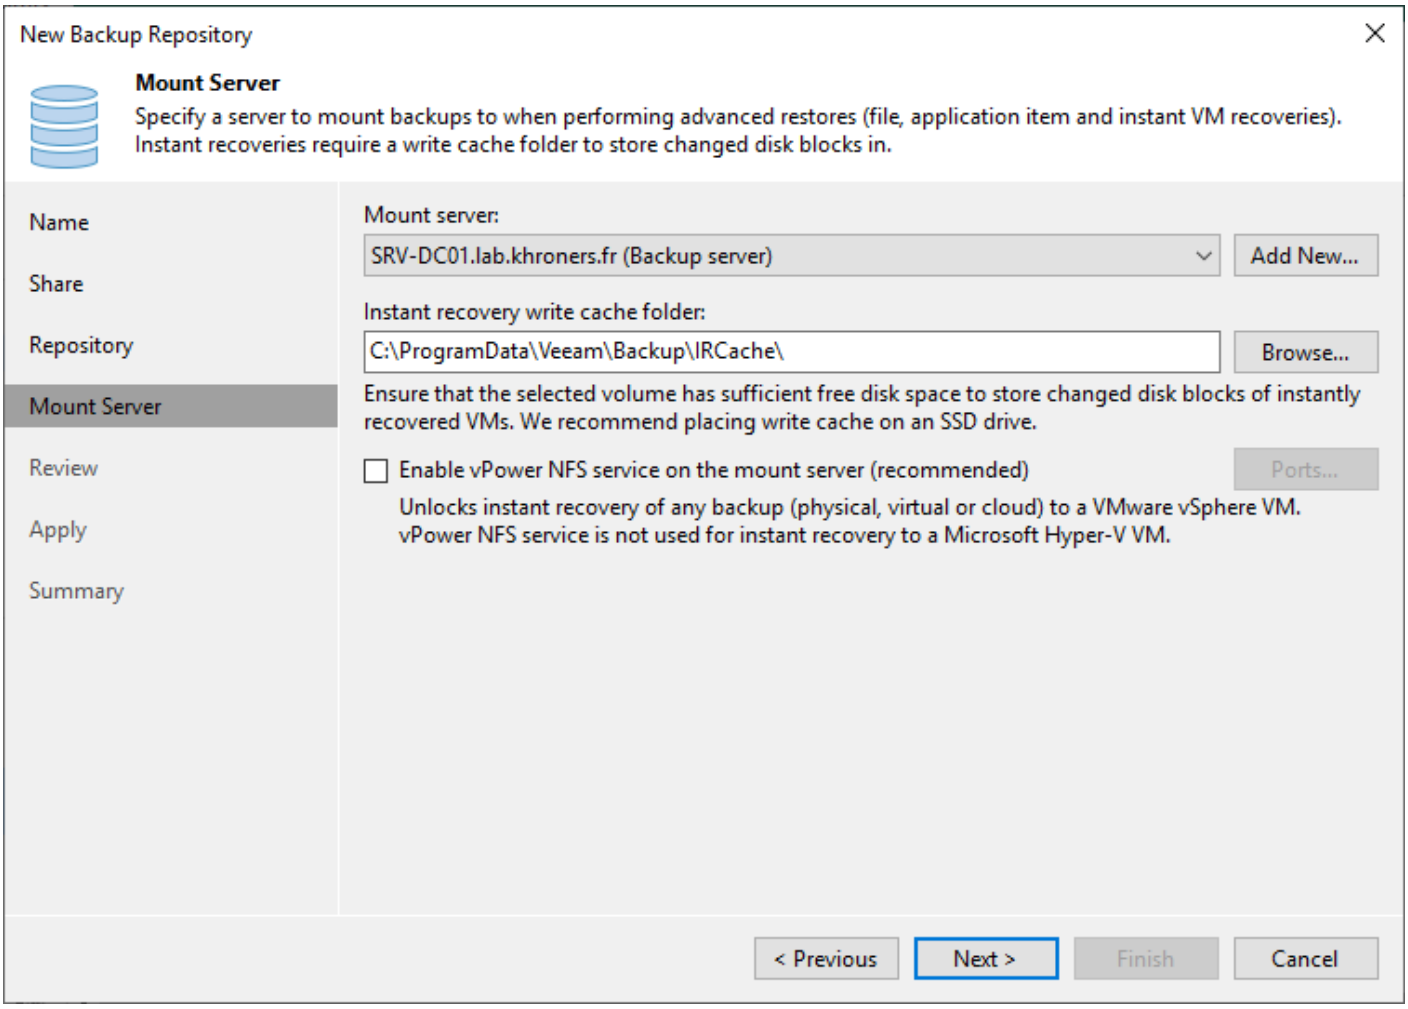
New Backup Repository
Mount Server
Specify a server to mount backups to when performing advanced restores (file, application item and instant VM recoveries). Instant recoveries require a write cache folder to store changed disk blocks in.
Name
Share
Repository
Mount Server
Review
Apply
Summary
Mount server:
SRV-DC01.lab.khroners.fr (Backup server)
Add New...
Instant recovery write cache folder:
C:\ProgramData\Veeam\Backup\IRCache\
Browse...
Ensure that the selected volume has sufficient free disk space to store changed disk blocks of instantly recovered VMs. We recommend placing write cache on an SSD drive.
Enable vPower NFS service on the mount server (recommended)
Ports...
Unlocks instant recovery of any backup (physical, virtual or cloud) to a VMware vSphere VM. vPower NFS service is not used for instant recovery to a Microsoft Hyper-V VM.
< Previous
Next >
Finish
Cancel

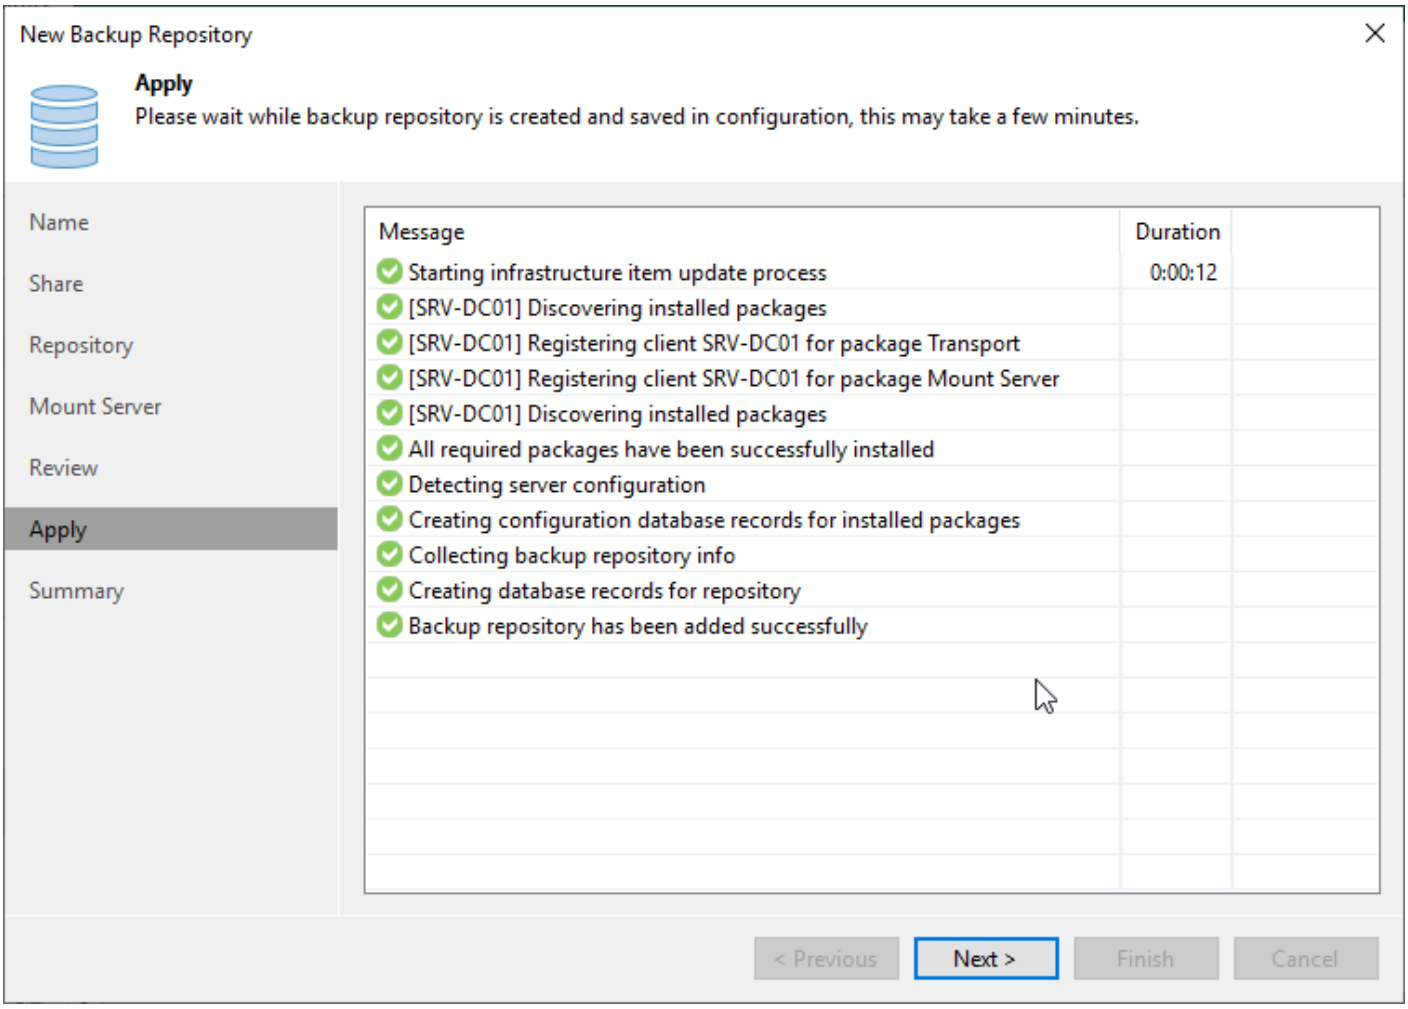

Voilà. On peut ajouter le répertoire en tant que répertoire de stockage par défaut.

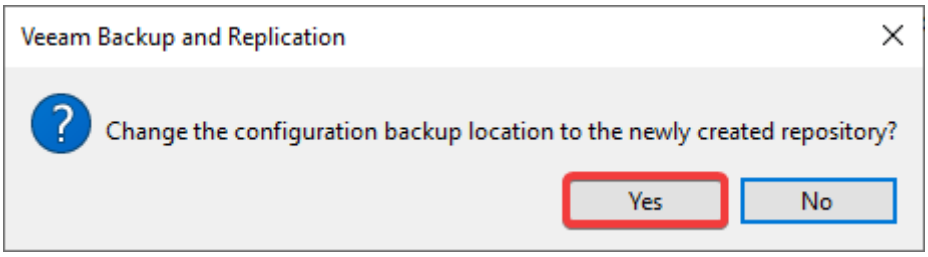

Revision #2
Created 2021-07-25 20:41:37 UTC by Khroners
Updated 2021-07-25 21:21:20 UTC by Khroners